



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 3 May 2001

Patents Act 1977
(Rule 16)



The
Patent
Office

1/77


Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

09NOV00 E582275-1 004113
P01/7700 0.00-0027310.2

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

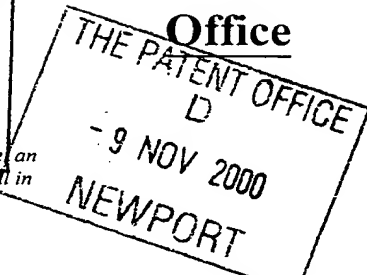

1. Your reference **81721/11550/02**

2. Patent application number **0027310.2**
(The Patent office will fill in this part)

3. Full name, address and postcode of the or of each applicant (underline all surnames)
**EASTMAN KODAK COMPANY
343 STATE STREET
ROCHESTER
NEW YORK 14650-2201
UNITED STATES OF AMERICA**

Patents ADP number (if you know it)

423020001

If the applicant is a corporate body, give the country/state of its incorporation

NEW JERSEY

4. Title of the invention **COATING FLUID FOR THE PREPARATION OF A RECORDING MEDIUM FOR USE IN INKJET PRINTING**

5. Name of your agent (if you have one) **R NUNNEY**

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

**KODAK LIMITED
PATENTS DEPARTMENT (W92-3A)
HEADSTONE DRIVE
HARROW
MIDDLESEX HA1 4TY**

Patents ADP number (if you know it)

5548029001

6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of Filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 8

Claim(s) 2

Abstract 1

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patent Form 9/77*)

Request for substantive examination (*Patent Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

R. F. Nunney

Signature

8.11.00
Date

12. Name and daytime telephone number of person to contact in the United Kingdom **R NUNNEY** **020 8424 3721**

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

COATING FLUID FOR THE PREPARATION OF A RECORDING MEDIUM FOR USE IN INKJET PRINTING

Field of the Invention

5 This invention relates to a coating fluid for the preparation of an ink absorbing recording medium for use in inkjet printing, to an ink absorbing material and to a process for the preparation of the ink absorbing material.

Background of the Invention

10 In recent years reflecting the use of electronic still cameras and computers, the hard copy technology to record images on paper sheets has been rapidly developed. The goal is to bring the colour reproducibility, image density, gloss and weather resistance of the hard copy to the same level as silver halide photography. Ink jet systems have been used for hard copy recording since full colouring is easy and the printing noise is low. In an ink jet system ink droplets
15 are ejected at high speed from nozzles to a recording material and the ink contains a large amount of solvent which is usually water.

 The recording sheet for an inkjet printer is required to swiftly absorb the ink and have good colour forming properties. To reduce the dry time of the ink it has been previously proposed to provide a recording sheet having a porous layer
20 formed on a substrate, the porous layer being formed of an inorganic oxides such as aluminium oxides or silica.

 US Patent No 4,517,244 discloses an ink jet recording material having enhanced fixation rates comprising a support having therein a water insoluble resin having a water absorbing capacity of from 50 to 100 times its own weight.

25 United States Patent No 5,212,008 discloses a recording sheet which comprises a substrate having two coatings. The first coating comprises (a) a crosslinking agent and (b) a polymer such as a polysaccharide cross linkable by (a). The second coating which is in contact with the first comprises a binder and compound such as an alkoxylated di-fatty quaternary compound.

30 European Patent Application No 916512 describes a coating fluid for application to a substrate for use in ink jet printing, the coating fluid comprising alumina

hydrate particles dispersed in an aqueous medium which contains as binders a polyvinyl alcohol and a polymerisable compound having a hydrocarbon group with a hydroxyl group or a compound having a polyoxyalkylene chain, said compound having a substituent with an unsaturated bond or an epoxy group. The
5 polymerisable compounds disclosed are monomers. The fluid is applied to a substrate such as polyethylene terephthalate, dried and heated with a polymerization initiator to effect polymerization of the polymerizable compound. Compared with the use of polyvinyl alcohol without the polymerizable binder, the advantage stated is that peeling of the coated layer is avoided and good image
10 quality is maintained for a long period of time.

Problem to be solved by the Invention

There is a continuing need to improve the ability of the coating to absorb ink applied to it since this reduces the drying time.

15 The present invention provides a solution to this problem by including a cross linking agent capable of reacting with the aluminium oxide or other inorganic oxide in the coating fluid to form a more rigid structure and increase the rate of drying of ink applied to the coating.

Summary of the Invention

20 According to the present invention there is provided a coating fluid for forming a coating on a support for use in inkjet printing said fluid comprising an liquid medium having dispersed therein (a) an inorganic oxide selected from aluminium oxide and silica, (b) a binder polymer, and (c) a polymeric cross linking agent containing functional groups for reaction with the inorganic oxide.

25 The components (a), (b) and (c) are preferably dispersed in an aqueous liquid.

According to another aspect of the present invention there is provided a process for the preparation of a coated support for use in inkjet printing which process comprises applying to the support a coating fluid as hereinbefore defined
30 and causing the crosslinking agent to react with the inorganic oxide.

According to a further aspect of the present invention there is provided a support having a coating formed from a coating fluid as hereinbefore defined.

Advantageous Effect of the Invention

The advantage of the present invention is that the crosslinking of the inorganic oxide creates a more rigid structure and has the effect that ink applied to the coating dries more quickly. The cross linking agent is a preformed polymer
5 and has a sufficient number of functional groups to increase the rigidity of the structure but not so many functional groups that it increases the rigidity too much which would make the coating brittle and risk cracking of the coating or so many functional groups that crosslinking occurs to an undesirably high degree such that the absorptive capacity of the layer is unduly reduced through excessive constraint
10 upon its swelling. The result is that the coating retains sufficient flexibility to avoid cracking under conditions of normal use.

Detailed Description of the Invention

The relative amounts of inorganic oxide to polymeric cross linking agent are conveniently from 500: 1 to 15:1 preferably 250:1 to 20:1, the relative
15 amounts of inorganic oxide to binder polymer are conveniently from 50:1 to 2:1 preferably 20:1 to 4:1 and the relative amounts of binder polymer to polymeric cross linking agent are conveniently from 40:1 to 2:1 preferably from 20:1 to 3:1 the amounts being by weight on a dry basis.

The binder polymer may be any of those known in the art. Such polymers
20 include polyvinyl pyrrolidone, polyvinyl acetate, copolymers of styrene and acrylates, copolymers of styrene and butadiene, polyacrylates and polymethacrylates, copolymers of acrylic and methacrylic acid, polyacrylamides and polymethacrylamides.

It is desirable that the binder polymer is soluble or dispersible in the
25 medium which is usually water. Conveniently the polymer will form a colloidal dispersion in water.

The preferred binder polymer is polyvinyl alcohol, and it is preferred to use one having a molecular weight of from 1,000 to 100,000, preferably from
5,000 to 50,000. The degree of hydrolysis may be at least 80% preferably at least
30 90% or 95%.

It is desirable that the inorganic oxide is dispersible in the medium which is usually water.

Preferably the inorganic oxide is capable of forming a colloidal dispersion in water. When the inorganic oxide is aluminium oxide it usually comprises
5 aluminium oxide hydrate particles. These are capable of being dispersed to form a colloidal dispersion in water.

The aluminium oxide is preferably fumed or colloidal since the particles are smaller (less than 100nm) although other forms such as precipitated or gel may be used.

10 As the aluminium oxide hydrate one represented by the compositional formula $\text{Al}_2\text{O}_3 \cdot n\text{H}_2\text{O}$ where n is from 1 to 1.5 may be used. It is suitable as an ink receiving layer since the colourant is well absorbed and fixed to it. Aluminium oxide in the form of Bohemite or pseudo-Bohemite may be used. The latter is described in United States Patent No 5,104,730.

15 The crosslinking agent is a molecule having at least two functional groups capable of reacting with $-\text{AlOH}$ or $-\text{SiOH}$ sites in the inorganic oxide. The functional groups are preferably silanol or silanol-forming groups such as SiOR where R is an alkyl group containing up to 6 carbon atoms or other monovalent hydrocarbon group containing from 1 to 6 carbon atoms. Alternatively the
20 functional groups may be carboxylic acid, epoxy or epoxy-forming groups.

Desirably the molecular weight of the cross linking agent is such that it is soluble or dispersible to form a colloidal dispersion in water. The molecular weight is not critical but will typically be in the range from about 1000 to about 30,000 for example from about 1500 to about 10,000.

25 The polymeric crosslinking agent may have the structure:

polymer-----A----- $\text{Si}(\text{OR})_3$ where

A is optional and when present is a linking group containing not more than 12 carbon atoms, R is hydrogen or a monovalent hydrocarbon group containing from

1 to 6 carbon atoms and the polymer is selected so that the crosslinking agent is dispersible in water

A preferred group of crosslinking agents are those containing water dispersible protein moiety linked through a short chain of carbon atoms typically 2
5 to 12 carbon atoms to a silicon atom containing the functional groups for the cross linking.

A typical member of the group is Crodasone C obtained commercially from Croda Chemicals limited which has the structure

10 gelatin-CH₂CH(OH)-O-(CH₂)₃-Si(OH)₃

where the gelatin has a molecular weight in the range from about 2,000 to 5,000. The gelatin has been partially hydrolysed to render it water dispersible and reduce its viscosity.

15 This molecule crosslinks through the silanol groups slowly on drying at 20 degrees Centigrade and fast at 60 degrees Centigrade.

Although it is beneficial to make the coating more rigid it is desirable the coating retain a degree of flexibility.

It is preferable therefore that the crosslinking agent has not more than one
20 functional group per 400 units of molecular weight, more preferably 1000 units of molecular weight.

As the means to coat the coating fluid of the present invention onto the substrate e.g. a dye coater, a roll coater, an airknife coater, a blade coater, a rod coater or a comma coater may be employed.

25 The crosslinking of the binder polymer by the cross linking agent may be effected at room temperature e.g. 20 degrees Centigrade, or may be promoted by heating, ultraviolet rays or an electron beam after coating.

The coating when dry forms a porous layer which may have pores having pore radii which are from 1 to 15nm, and the pore volume may be from 0.4 to 2.0cc/g. The porous layer will then have an adequate absorptivity, and transparency.

- 5 The pore radii may be from 3 to 10nm. The pore radii distribution may be measured by a nitrogen adsorption/desorption method.

 The thickness of the porous layer on the recording sheet is suitably selected depending upon eg the specification of the printer. The thickness may be above or below 100 micrometres. It is frequently in the range from about 30 to
10 about 50 micrometres at a void fraction of 0.5. (ie volume of pores is 50% of the layer)

 The invention is illustrated by the following Examples.

 Functional Polymers to Serve as cross linking agents for Ink Jet Media

15 **Example 1**

 A coating fluid was prepared by mixing together at room temperature an aqueous aluminium oxide slurry containing about 40% by weight of solids, a dispersion of polyvinyl alcohol (98% hydrolysis, molecular weight 13,000 to
20 23,000) in water containing about 10% by weight of solids and a dispersion of the polymeric crosslinking agent containing about 2.5% by weight of solids. The amounts of the three dispersions were adjusted to yield a coating containing the three components in the weight ratio of about 90:9:1 aluminium oxide: polyvinyl alcohol: polymeric cross linking agent on a dry basis. After mixing the dispersions
25 together the mixture was used immediately to coat an ESTARTM support to form an ink absorbing layer

 Using a rod coater the ink absorbing layer was coated at a lay down of between 24g/m² and 28g/m² of aluminium oxide slurry, between 2.5 and 3.5 g/m² polyvinyl alcohol and a cross linking agent at a laydown of approx. 0.25g/m².
30 The aluminium oxide, PVA and cross linking agent were therefore coated at a ratio of approximately 90:9:1 by weight. on a dry basis.

The coating was allowed to dry at 20 degrees centigrade. The crosslinking reactions were allowed to take place during the drying. No heating or other means to assist the cross linking was necessary .

The function of the crosslinking agent in the ink absorbing layer is to crosslink with the inorganic oxide, which creates a more rigid structure. This forces the aluminium oxide particles to be more separated, which in turn imparts more free volume. This can be evaluated by the measuring the density of ink transferred to a piece of plain paper, which had been sandwiched to the printed image immediately after the sample exited the ink jet printer. The lower the density of ink on the plain paper, the faster the sample dried. An alternative method is to visually assess the piece of plain paper that had been sandwiched to the printed image and identify the point at which the ink transfer disappears. Knowing the time taken for the image to print, this can then be used to calculate the average time taken for the sample to dry.

The results in table 1 show the density of ink transferred to the piece of plain paper 60 seconds after the sample has exited the printer. Average time taken for the samples to dry is also shown compared to the control coating where no crosslinking agent was added.

TABLE 1

AOS (g/m ²)	PVA (g/m ²)	Glue 1 (g/m ²)	Glue 2 (g/m ²)	Epson Stylus Photo 700		Canon BJC4400	
				Ink Density @ 60s	Avg Dry Time (Mins)	Ink Density @ 60s	Avg Dry Time (Mins)
24.42	2.71	0.244	-	0.001	0.42	0.760	2.17
24.97	2.77	-	0.250	0.062	0.85	0.080	0.50
27.20	3.06	-	-	1.211	> 4.27	0.859	3.33
Time Taken To Print Image (Mins)				4.27		5.95	

Key:

AOS = Aluminium Oxide Slurry

crosslinking agent 1 = Crodasone* Sesame (sesame amino acid polysiloxane copolymer) referred to as glue 1 in the above table

crosslinking agent 2 = Crodasone* W (aqua and hydrolysed wheat protein hydroxpropyl polysiloxane) referred to as glue 2 in the above table.

5 * obtained commercially from Croda Colloids Limited of the U.K.
60 degrees Centigrade.

The results show quite clearly for the two ink sets tested, that both the average time taken to dry the sample and the density of ink transferred 60 seconds after the sample was ejected from the printer are improved when the crosslinking
10 agent is present in the formulation.

Printer set-ups:

Epson Stylus Photo 700 printer was used with the following settings:

Print quality – superfine 1440 dpi

15 Photo quality ink jet paper

Canon BJC4400 printer was used with the following settings:

High print quality

Photo colour

20 Automatic print model

Glossy photo paper

CLAIMS:

1. A coating fluid for forming a coating on a support for use in inkjet printing said fluid comprises a liquid medium having dispersed therein (a) an
5 inorganic oxide selected from aluminium oxide and silica, (b) a binder polymer, and (c) a polymeric crosslinking agent containing functional groups for reaction with the inorganic oxide.

2. A coating fluid as claimed in claim 1 wherein the components (a), (b)
10 and (c) are dispersed in an aqueous liquid.

3. A coating fluid as claimed in any one of the preceding claims wherein the binder polymer is polyvinyl alcohol.

15 4. A coating fluid as claimed in any one of the preceding claims wherein the relative amount of inorganic oxide to polymeric cross linking agent is from 500: 1 to 15:1 preferably 250:1 to 20:1, the relative amount of inorganic oxide to binder polymer is from 50:1 to 2:1 preferably 20:1 to 4:1 and the relative amount of binder polymer to polymeric crosslinking agent is from 40:1 to 2:1 preferably
20 from 20:1 to 3:1 the amounts being by weight on a dry basis.

5. A coating fluid as claimed in any one of the preceding claims wherein the polymeric crosslinking agent has the structure:

polymer-----A-----Si(OR)₃ where

25 A is optional and when present is a linking group containing not more than 12 carbon atoms, R is hydrogen or a monovalent hydrocarbon group containing from 1 to 6 carbon atoms and the polymer is selected so that the crosslinking agent is dispersible in water.

6. A coating fluid as claimed in any one of the preceding claims wherein the polymeric crosslinking agent has been obtained by the partial hydrolysis of a protein to render it water dispersible and reaction with a silane containing functional groups for the cross linking of the inorganic oxide.

5

7. A coating fluid as claimed in any one of the preceding claims wherein the functional groups in the cross linking agent are capable of reacting with hydroxyl groups on the inorganic oxide to form in the case of alumina Si-O-Al bonds or in the case of silica Si-O-Si bonds

10

8. A process for the preparation of a coated support for use as an ink absorbing substrate in inkjet printing which process comprises applying to the support a coating fluid as claimed in any one of the preceding claims and causing the crosslinking agent to react with the inorganic oxide.

15

9. A coated support for use in ink jet printing said support having a coating formed by the application to the support of a coating fluid as claimed in any one of claims 1 to 7.

20

Abstract

COATING FLUID FOR USE IN INKJET PRINTING

5 A coating fluid for forming a coating on a support for use in inkjet printing
comprises a liquid medium having dispersed therein (a) an inorganic oxide
selected from aluminium oxide and silica, (b) a binder polymer, and (c) a
polymeric crosslinking agent containing functional groups for reaction with the
inorganic oxide. The components (a), (b) and (c) are preferably dispersed in an
10 aqueous liquid and the relative amounts of inorganic oxide to polymeric
crosslinking agent are from 500: 1 to 15:1 preferably 250:1 to 20:1, the relative
amounts of inorganic oxide to binder polymer are from 50:1 to 2:1 preferably 20:1
to 4:1 and the relative amounts of binder polymer to polymeric crosslinking agent
are from 40:1 to 2:1 preferably from 20:1 to 3:1 the amounts being by weight on a
15 dry basis.

